


CORRECTIONS : Déclinaison et orientations magnétiques - Minimums opérationnels MVL Cat A

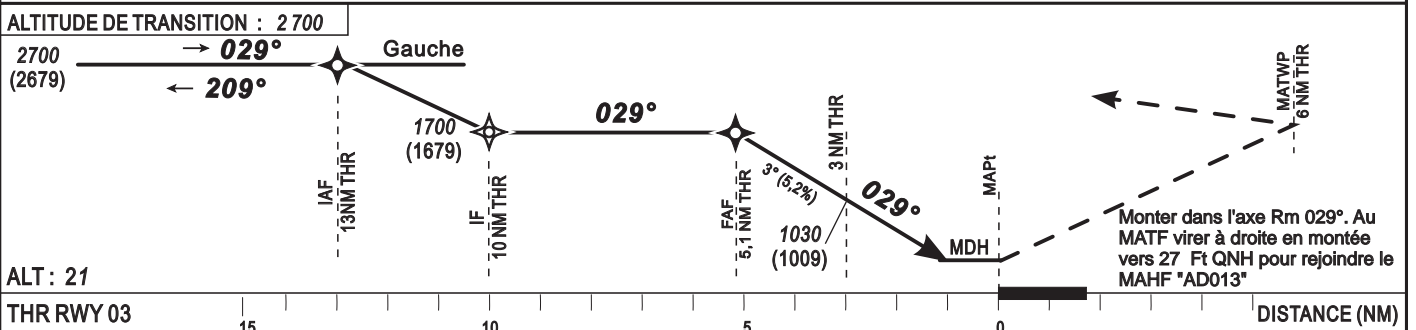

CAT	GNSS				MVL (1)				RVR au décollage CAT A - B - C : 250 CAT D : 300
	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VH	
A	354 (333)	360 (340)	1500	449 (438)	450 (440)	1500			PROCÉDURE A EXPLOITER CONFORMÉMENT A L'AIC NR 02 / A / 2002 DAKAR DU 21 MARS 2002
B	354 (333)	360 (340)	1500	486 (475)	520 (500)	1600			
C	354 (333)	360 (340)	1800	585 (574)	620 (600)	2400			
D	354 (333)	360 (340)	2000	709 (698)	720 (700)	3600			

Observations : (1) HJ seulement

Temps	FAWP / THR 5,1 NM						
	KT	MIN	SEC	KT	MIN	SEC	
90	3	Min	24	140	2	Min	11
100	3	Min	04	150	2	Min	02
110	2	Min	47	160	1	Min	55
120	2	Min	33	170	1	Min	48
130	2	Min	21	180	1	Min	42